

As solid as diamond.

Embedded DVR



- Embedded Win XP Design (OS inside the DOM module)
- No More Break Downs; Always Recording
 - Hot Standby REC
 - System Redundancy (optional)
- Alarm and Bad Hard Drive E-mail Notification
- Bandwidth limitation
- 3G Wireless Remote Viewing
- Network and Internet Time Synchronization
- Removable HDD design for easy archiving and maintenance (Tracker168 only)

Net168 (4CH, 8CH)




- Remote PC Software
 - PSTN or Network Remote Viewing s/w supplied
 - PocketView s/w supplied (via 3G handset)*1
 - Multi-site Monitoring (on request)
 - AVI and Print Function
 - System Configuration
- Video Export via CD burner
 - Standard Windows Format
 - Proprietary Format with Multi-cam Viewer
- Proprietary Compression Engine
 - Longer Storage Time
 - Clearer Pictures
 - Speedier Transmission rate

Tracker168 (16CH)



- Dynamic (DHCP) IP Support
- Camera Record Priority
- Smart Activity Search (search a series of motion videos)
- Triplex (Record, Playback, Archive simultaneously)
- Watch dog (hardware)
- Audio (optional)

Hot Standby REC

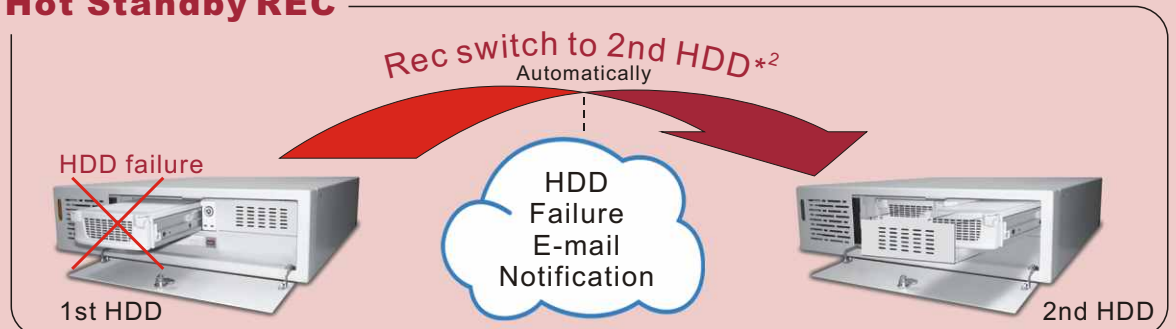

Note: 1. Support "Windows Mobile OS" 3G Handset ONLY
 2. The switching time is around 1.5 minutes; and DVR will NOT record during this period.

Specification

Model nr	Net168		Tracker168
Operation system	WinXP Embedded (stored in DOM Module)		
Codec	Proprietary M-JPEG + Wavelet		
Watch Dog Timer	Hardware		
Video - Video input	x 4	x 8	x 16
- Loop through	x 4	N/A	x 16
- VGA output	x 1	x 1	x 1
- Sequential output (composite)	N/A	N/A	x 4
Audio - Input	Optional		
- Speaker out	Optional		
Alarm Input	Dry contact x 4	Dry contact x 8	Dry contact x 16
Control output	x 1	x 1	x 1
RS232 interface	x 1	x 1	x 1
TCPIP (internet)	RJ45 x 1	RJ45 x 1	RJ45 x 1
Hot Standby REC	Yes (valid for more than two HDDs configuration ONLY)		
Redundancy REC	Yes (valid for more than two HDDs configuration ONLY)		
Display rate (max) - Spot mode	120 f/s		120 f/s
- Divided mode	60 f/s		120 f/s
Display resolution (max)	640 x 480 pixels		
Recording rate (max.)	60 f/s		120 f/s
Recording resolution (max.)	640 x 480 pixels		
Recording quality	Low, Fair, Good, Better, Best		
Compression ratio	600:1 (1.5kB)		
Nr of installed hard disk (IDE Type, max)	x 2		x 3
Water Mark	Yes		
Built-in CD Writer for AVI Export	Optional		Optional
AVI export media	CD Writer, external USB memory stick & etc..		
System alarm	Video Loss, Motion, External Alarm		
PTZ Control	Pelco, Panasonic, Kalatel, Bosch & others.		
Power source	90 to 264Vac, 50/60 Hz Switching		
Power consumption	< 50 W	< 50 W	< 185 W
Weight	Net: 13.23 LB (6kg), Gross: 17.64 LB (8kg)		Net: 33.07 LB (15kg), Gross: 41.89 LB (19kg)
Dimension	335x435x45 (mm) 13.18x17.13x1.77 (inch)		473x430x111 (mm) 18.62x16.93x4.37 (inch)
Approval	CE, FCC		

Specifications are subject to change without prior notice




Telexper Inc.
33235 Transit Avenue,
Union City, CA 94587 U.S.A.
Tel : +1.510.477 9150
Fax: +1.510.477 9644

Telexper International Inc.
3F-3, No. 2, Chien Pa Rd.,
Chung Ho City, Taipei 235,
Taiwan, R.O.C.
Tel : +886.2.6620 5898
Fax: +886.2.6620 6909



Distributed By:



168embedded-1-5